



► **Features**




Timer

24:00

Timer



Hot start function



Horizontal movement of the blinds



Several fan speeds



Key lock

► **Controls and accessories**




Wireless controller
R05/BGE - standard

► **Specification**


The universal design of the CH-FW wall-mounted fan coils allows the equipment to be installed quickly and easily in any room. The fan coil units of this series come with a 3-way valve, which allows the most efficient regulation of the unit's output. A wireless infrared remote control allows convenient operation of the installation.

Wall mounting

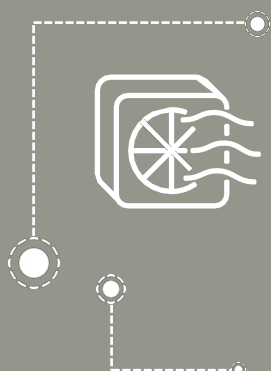


Multi-speed fan motor

Washable polypropylene filter

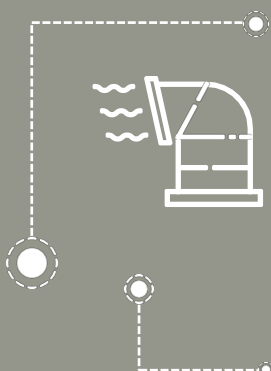


Low noise level

Environmentally friendly plastic housing

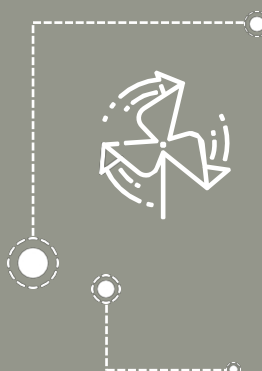

New wireless remote control

New infrared wireless remote control

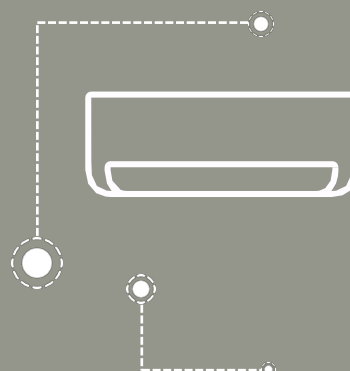


Built-in 3-way valve

UNITS

Model				CH-FW25K2A	CH-FW30K2A	CH-FW40K2A	CH-FW50K2A	CH-FW60K2A
Air flow		high/medium/low	m3/h	350/390/425	390/470/510	460/550/680	620/745/850	780/915/1020
Cooling	Performance	high/medium/low	kW	2.16/2.41/2.63	2.12/2.47/2.97	2.41/2.83/3.28	3.32/3.85/4.25	3.97/4.47/5.0
	Water flow		l/h	452	511	564	731	860
	Drop in water pressure		kPa	29.4	35.6	43.5	31.8	42.8
Heating	Performance	high/medium/low	kW	2.79/3.10/3.36	2.77/3.26/3.91	3.17/3.73/4.37	4.43/5.17/5.81	5.28/6.0/6.7
	Drop in water pressure		kPa	27.3	32.9	40.8	30.2	39.7
Power supply			V ~Hz/phase		230V ~50Hz/1 phase			
Power consumption			W	17/19/24	26/29/37	28/32/40	35/40/50	46/53/66
Pressure level acoustic		high/medium/low	dB(A)	20/24/30	24/29/35	26/31/37	28/33/39	29/34/40
Power consumption			MPa	1.6	1.6	1.6	1.6	1.6
Unit	Dimensions	W x H x D	mm	915x920x233	915x290x233	915x290x233	1072x315x237	1072x315x237
	Mass		kg	13/16.3	13/16.3	13.3/16.7	15.8/19.4	15.8/19.4
Connections	Water inlet/outlet connections		inch	G3/4	G3/4	G3/4	G3/4	G3/4
	Drainage		mm	Ø20	Ø20	Ø20	Ø20	Ø20

INDOOR UNIT - DIMENSIONS CH-FW25K2A ~ CH-FW60K2A

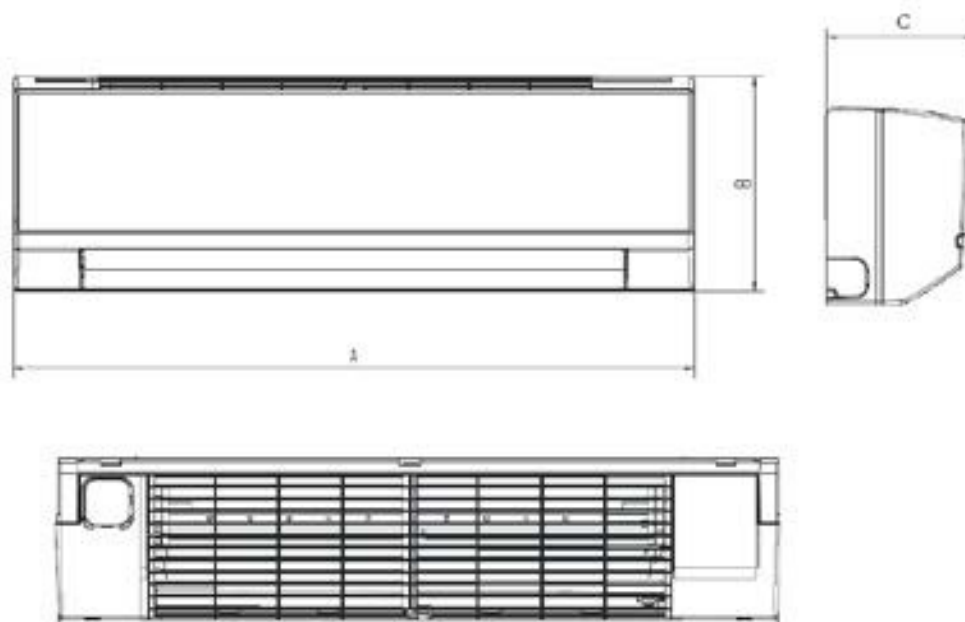

Model	A	B	C
CH-FW25K2A	915	290	233
CH-FW30K2A	915	290	233
CH-FW40K2A	915	290	233
CH-FW50K2A	1072	315	237
CH-FW60K2A	1072	315	237